


T11S Series Sideshifting Fork Clamp

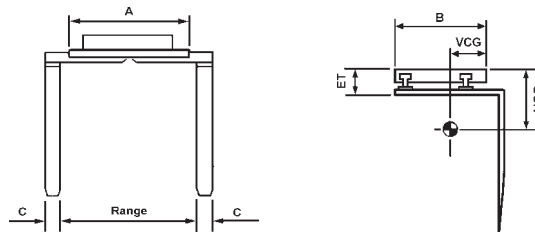

Hydraulic Requirements: Single function auxiliary kit

Model No.	Capacity @ 24" LC	Range Inside Forks	Fork Length	Mtg	Weight	ET	HCG	VCG	A	B	C
T11-25-36S	2500	20 - 62	36	II	652	6.3	5.6	8.8	36	22.6	4
T11-25-42S	2500	20 - 62	42	II	672	6.3	6.5	8.6	36	22.6	4
T11-25-48S	2500	20 - 62	48	II	693	6.3	7.6	8.4	36	22.6	4
T11-35-36S	3500	20 - 62	36	II	719	6.3	5.3	10.0	36	22.6	4
T11-35-42S	3500	20 - 62	42	II	739	6.3	6.2	9.7	36	22.6	4
T11-35-48S	3500	20 - 62	48	II	760	6.3	7.2	9.5	36	22.6	4
T11-50-36S	5000	20 - 72	36	II / III	981	7.0	5.3	11.3	43	25.1	5
T11-50-42S	5000	20 - 72	42	II / III	1007	7.0	6.1	11.0	43	25.1	5
T11-50-48S	5000	20 - 72	48	II / III	1032	7.0	7.0	10.7	43	25.1	5
T11-50-54S	5000	20 - 72	54	II / III	1058	7.0	8.0	10.5	43	25.1	5
T11-65-42S	6500	20 - 76	42	III	1591	7.9	6.3	14.1	48	31.0	6
T11-65-48S	6500	20 - 76	48	III	1621	7.9	7.0	13.8	48	31.0	6
T11-65-54S	6500	20 - 76	54	III	1652	7.9	7.8	13.6	48	31.0	6
T11-65-60S	6500	20 - 76	60	III	1682	7.9	8.6	13.3	48	31.0	6
T11-95-42S	9500	24 - 86	42	IV	2607	9.3	7.1	15.8	60	35.8	8
T11-95-48S	9500	24 - 86	48	IV	2661	9.3	7.9	15.5	60	35.8	8
T11-95-54S	9500	24 - 86	54	IV	2716	9.3	8.7	15.2	60	35.8	8
T11-95-60S	9500	24 - 86	60	IV	2770	9.3	9.6	15.0	60	35.8	8
T11-95-72S	9500	24 - 86	72	IV	2879	9.3	10.2	14.4	60	35.8	8

Forks open and close equally and sideshift left or right

Things we need to know...

- ↙
↘
↙
↘
- Weight of Load
Max. Width of Load
Load
Min. Width of Load
- ↙
↘
↙
↘
- Height of Load
Length of Load
Length of Fork
Forklift Capacity