

T16 Series Paper Roll Clamp



T16PR Series - Rigid Short Arm


Model No.	Capacity	Min. Roll Diameter	Max. Roll Diameter	Mtg	Weight	ET	HCG	VCG	Mtg Angle	Pad Size
T16-15-15-42PR	1500	15	42	II	930	10	12.7	11.6	0	8 X 24
T16-15-15-52PR	1500	15	52	II	975	10	14.1	11.6	0	8 X 24
T16-15-15-60PR	1500	15	60	II	1025	10	15.8	11.6	0	8 X 24
T16-25-15-42PR	2500	15	42	II	1100	8	11.6	10.9	4	9 X 28
T16-25-15-45PR	2500	15	45	II	1125	8	11.9	10.9	4	9 X 28
T16-25-15-52PR	2350	15	52	II	1145	8	12.9	10.9	4	9 X 28
T16-25-15-60PR	2150	15	60	II	1195	8	14.4	10.9	4	9 X 28
T16-35-20-45PR	3500	20	45	II	1215	8	11.9	10.9	4	9 X 30
T16-35-25-52PR	3500	25	52	II	1325	8	12.3	10.9	4	9 X 30
T16-35-30-60PR	3000	30	60	II	1410	8	12.8	10.9	4	9 X 30
T16-45-20-45PR	4500	20	45	III	1457	9	12.2	13.2	4	10 X 34
T16-45-25-52PR	4500	25	52	III	1513	9	13.4	13.2	4	10 X 34
T16-45-30-60PR	4000	30	60	III	1570	9	14.8	13.2	4	10 X 34
T16-60-20-52PR	6000	20	52	III	2052	9.5	14.3	15.7	4	10 X 36
T16-60-25-60PR	5200	25	60	III	2104	9.5	15.4	15.7	4	10 X 36
T16-60-35-72PR	4350	35	72	III	2275	9.5	16.8	15.7	4	10 X 36

Maximum Pressure

2250 psi (150 bar)

Recommended Flow

6 gpm (27 litres)

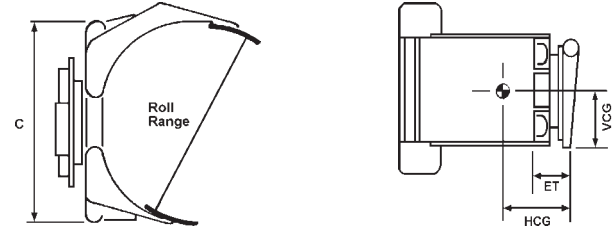

Hydraulic Requirements: Double function auxiliary kit

T16PS Series - Moving Short Arm

Model No.	Capacity	Min. Roll Diameter	Max. Roll Diameter	Mtg	Weight	ET	HCG	VCG	Mtg Angle	Pad Size
T16-45-12-45PS	4500	12	45	III	1497	9	12.2	13.2	4	10 X 34
T16-45-12-52PS	4500	12	52	III	1553	9	13.4	13.2	4	10 X 34
T16-45-20-60PS	4500	20	60	III	1610	9	14.8	13.2	4	10 X 34
T16-60-12-52PS	6000	12	52	III	2002	9.5	14.3	15.7	4	10 X 36
T16-60-20-60PS	5200	20	60	III	2154	9.5	15.4	15.7	4	10 X 36
T16-60-25-72PS	4350	25	72	III	2325	9.5	16.8	15.7	4	10 X 36

Optional Auxiliary Hydraulics

- 3 way pressure reducing valve
- Variable pressure reducing valve
- Pressure gauge
- Quick disconnect couplings

Things we need to know...

- ✓ Weight of Roll
- ✓ Height of Roll
- ✓ Max. Diameter of Roll
- ✓ Min. Diameter of Roll
- ✓ Type of Paper
- ✓ Degrees of Rotation
- ✓ Forklift Capacity