




# T30 Series Fork Positioner

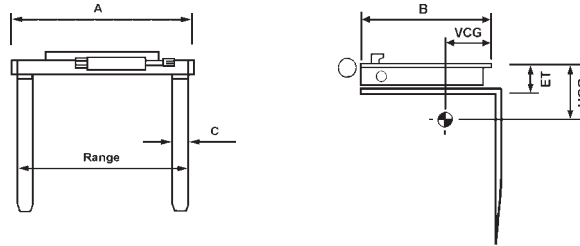

**Hydraulic Requirements:** Double function auxiliary kit

Model No.	Capacity @ 24" LC	Range Outside Forks	Mtg	Weight	ET	HCG	VCG	A	B	C
T30-55-12-36	5500	12 - 36	II	390	5	3	10	38.0	24	5
T30-55-12-42	5500	12 - 42	II	425	5	3	10	44.0	24	5
T30-55-12-48	5500	12 - 48	II	460	5	3	10	50.0	24	5
T30-100-14-42	10000	14 - 42	III	660	6	4	13	44.5	30	6
T30-100-14-48	10000	14 - 48	III	690	6	4	13	44.5	30	6
T30-100-20-54	10000	20 - 54	III	725	6	4	13	56.5	30	6
T30-100-26-60	10000	26 - 60	III	755	6	4	13	62.5	30	6
T30-150-14-48	15000	14 - 48	IV	920	7	4	16	51.0	33	6
T30-150-14-54	15000	14 - 54	IV	960	7	4	16	57.0	33	6
T30-150-20-60	15000	20 - 60	IV	1040	7	4	16	63.0	33	6
T30-150-26-72	15000	26 - 72	IV	1100	7	4	16	75.0	33	6

### Maximum Pressure

2250 psi (150 bar)

### Recommended Flow

6 gpm (27 litres)

### Optional Auxiliary Hydraulics

- 3 way pressure reducing valve
- Variable pressure reducing valve
- Pressure gauge
- Quick disconnect couplings

**Things we need to know...**

- ✓ Weight of Load
- ✓ Max. Width of Load
- ✓ Min. Width of Load
- ✓ Height of Load
- ✓ Length of Load
- ✓ Make of Forklift