


# T7B Series Basic Hydraulic Clamp

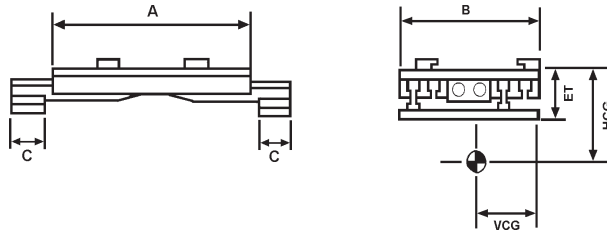

Hydraulic Requirements: Single function auxiliary kit

Model No.	Capacity @ 24" LC	Range Inside Arms	Mtg	Weight						
					ET	HCG	VCG	A	B	C
T7-25-20-62B	2500	20 - 62	II	480	4.8	2.2	10.1	36	21.0	4
T7-35-20-62B	3500	20 - 62	II	547	4.8	2.3	11.4	36	22.6	4
T7-50-20-72B	5000	20 - 72	II / III	757	5.5	2.5	12.5	43	25.1	5
T7-65-20-76B	6500	20 - 76	III	1259	6.4	3.5	15.5	48	31.0	6
T7-95-24-86B	9500	24 - 86	IV	1954	7.3	3.7	17.3	60	35.8	8
T7-120-30-100B	12000	30 - 100	IV	2300	8.0	4.0	19.0	66	36.0	8

Arms open and close equally (non-sideshifting)

### Maximum Pressure

2250 psi (150 bar)

### Recommended Flow

6 gpm (27 litres)

### Optional Auxiliary Hydraulics

- 3 way pressure reducing valve
- Variable pressure reducing valve
- Pressure gauge
- Quick disconnect couplings

**Things we need to know...**

- ✓ Weight of Load
- ✓ Width of Load
- ✓ Height of Load
- ✓ Length of Load
- ✓ Bolt on or Weld on Arms
- ✓ Bolt on or Weld on Forks
- ✓ Forklift Capacity