


T8S Series Sideshifting Hydraulic Bale Clamp



Model No.	Capacity @ 24" LC	Range Inside Arms	Arm Length	Arm Height	Weight	Weight			A	B	C
						ET	HCG	VCG			
T8-25-28-15S	2500	22 - 64	28	15	820	4.8	8.7	9.0	36	22.6	1.25
T8-25-32-15S	2500	22 - 64	32	15	862	4.8	10.0	8.9	36	22.6	1.25
T8-25-36-15S	2500	22 - 64	36	15	905	4.8	11.4	8.9	36	22.6	1.25
T8-25-42-15S	2500	22 - 64	42	15	968	4.8	13.6	8.8	36	22.6	1.25
T8-25-48-15S	2500	22 - 64	48	15	1032	4.8	15.9	8.7	36	22.6	1.25
T8-35-28-15S	3500	22 - 64	28	15	887	4.8	5.2	9.9	36	22.6	1.25
T8-35-32-15S	3500	22 - 64	32	15	929	4.8	6.1	9.8	36	22.6	1.25
T8-35-36-15S	3500	22 - 64	36	15	972	4.8	7.2	9.7	36	22.6	1.25
T8-35-42-15S	3500	22 - 64	42	15	1035	4.8	8.9	9.6	36	22.6	1.25
T8-35-48-15S	3500	22 - 64	48	15	1099	4.8	10.7	9.4	36	22.6	1.25
T8-35-28-18S	3500	22 - 64	28	18	946	4.8	6.8	10.4	36	22.6	1.25
T8-35-32-18S	3500	22 - 64	32	18	997	4.8	8.0	10.3	36	22.6	1.25
T8-35-36-18S	3500	22 - 64	36	18	1048	4.8	9.3	10.3	36	22.6	1.25
T8-35-42-18S	3500	22 - 64	42	18	1125	4.8	12.3	10.2	36	22.6	1.25
T8-35-48-18S	3500	22 - 64	48	18	1201	4.8	13.6	10.1	36	22.6	1.25
T8-50-28-15S	5000	24 - 76	28	15	1165	5.5	6.2	10.7	43	25.1	1.50
T8-50-32-15S	5000	24 - 76	32	15	1216	5.5	7.2	10.6	43	25.1	1.50
T8-50-36-15S	5000	24 - 76	36	15	1277	5.5	8.3	10.4	43	25.1	1.50
T8-50-42-15S	5000	24 - 76	42	15	1343	5.5	10.1	10.3	43	25.1	1.50
T8-50-48-15S	5000	24 - 76	48	15	1420	5.5	12.1	10.2	43	25.1	1.50
T8-50-28-18S	5000	24 - 76	28	18	1236	5.5	6.6	11.1	43	25.1	1.50
T8-50-32-18S	5000	24 - 76	32	18	1297	5.5	7.7	11.0	43	25.1	1.50
T8-50-36-18S	5000	24 - 76	36	18	1358	5.5	8.9	11.0	43	25.1	1.50
T8-50-42-18S	5000	24 - 76	42	18	1450	5.5	10.9	10.8	43	25.1	1.50
T8-50-48-18S	5000	24 - 76	48	18	1542	5.5	12.9	10.7	43	25.1	1.50

Forks open and close equally and sideshift left or right

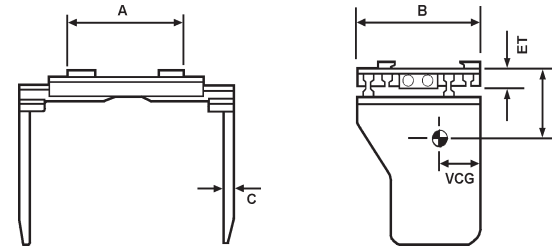

Hydraulic Requirements: Double function auxiliary kit

Model No.	Capacity @ 24" LC	Range Inside Arms	Arm Length	Arm Height	Weight	Weight			A	B	C
						ET	HCG	VCG			
T8-65-28-15S	6500	24 - 80	28	15	1735	6.4	6.1	13.3	48	31.0	1.75
T8-65-32-15S	6500	24 - 80	32	15	1794	6.4	6.9	13.1	48	31.0	1.75
T8-65-36-15S	6500	24 - 80	36	15	1854	6.4	7.8	12.9	48	31.0	1.75
T8-65-42-15S	6500	24 - 80	42	15	1943	6.4	9.3	12.7	48	31.0	1.75
T8-65-48-15S	6500	24 - 80	48	15	2032	6.4	10.9	12.5	48	31.0	1.75
T8-65-28-18S	6500	24 - 80	28	18	1818	6.4	6.4	13.5	48	31.0	1.75
T8-65-32-18S	6500	24 - 80	32	18	1889	6.4	7.3	13.3	48	31.0	1.75
T8-65-36-18S	6500	24 - 80	36	18	1961	6.4	8.3	13.2	48	31.0	1.75
T8-65-42-18S	6500	24 - 80	42	18	2068	6.4	10.0	13.0	48	31.0	1.75
T8-65-48-18S	6500	24 - 80	48	18	2175	6.4	11.7	12.8	48	31.0	1.75
T8-95-48-18S	9500	34 - 96	48	18	3001	7.3	3.9	14.4	60	35.8	2.00
T8-95-54-18S	9500	34 - 96	54	18	3213	7.3	4.3	13.8	60	35.8	2.00
T8-95-60-18S	9500	34 - 96	60	18	3245	7.3	5.0	14.0	60	35.8	2.00

Things we need to know...

- ✓ Weight of Load
- ✓ Min. Width of Load
- ✓ Height of Load
- ✓ Forklift Capacity
- ✓ Max. Width of Load
- ✓ Type of Product
- ✓ Length of Load