


T9P Series Pivot Pad Carton Clamp

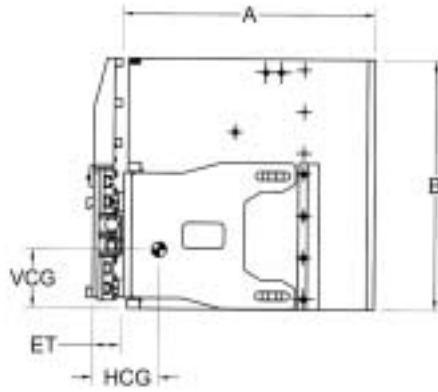

Requirements: Double function auxiliary kit

Model No.	Capacity	@ LC	Range Inside Pads	Frame Width	Frame		Weight	ET	HCG	VCG	Mtg
					A	B					
T9-25-30-48P	2500	15	22 - 76	44	30	48	1154	5.5	8.6	15.3	II
T9-25-36-48P	2500	18	22 - 76	44	36	48	1267	5.5	10.0	15.4	II
T9-25-42-48P	2500	20	22 - 76	44	42	48	1375	5.5	11.6	15.5	II
T9-25-45-48P	2500	22	22 - 76	44	45	48	1429	5.5	12.4	15.5	II
T9-25-48-48P	2500	24	22 - 76	44	48	48	1483	5.5	13.2	15.5	II
T9-35-30-48P	3500	15	22 - 76	44	30	48	1214	5.5	8.6	15.3	II
T9-35-36-48P	3500	18	22 - 76	44	36	48	1327	5.5	10.0	15.4	II
T9-35-42-48P	3500	20	22 - 76	44	42	48	1435	5.5	11.6	15.5	II
T9-35-45-48P	3500	22	22 - 76	44	45	48	1489	5.5	12.4	15.5	II
T9-35-48-48P	3500	24	22 - 76	44	48	48	1543	5.5	13.2	15.5	II
T9-35-52-48P	3230	26	22 - 76	44	52	48	1615	5.5	14.3	15.6	II
T9-35-54-48P	3100	27	22 - 76	44	54	48	1651	5.5	14.8	15.6	II
T9-35-60-48P	2800	30	22 - 76	44	60	48	1758	5.5	16.4	15.7	II

Arms open and close equally and sideshift left or right

Maximum Pressure
2250 psi (150 bar)

Recommended Flow
6 gpm (27 litres)

Optional Auxiliary Hydraulics
3 way pressure reducing valve
Variable pressure reducing valve
Pressure gauge
Quick disconnect couplings

Things we need to know...

Weight of the load
Maximum width of load
Minimum width of load
Height of load

Length of load
Type of product
Forklift capacity